


THE NEVERLEAK COMPANY, LP

SPECIFICATION SUBMITTAL SHEET

NEVA-CALK™ COPPER BASE ROOF FLASHINGS

SPECIFICATION:

Deep drawn 99.99% pure copper base 16 ounce, which offers excellent corrosion resistance. A premium elastomeric collar is mechanically locked to the base to form a one-piece assembly. All made from prime/virgin materials.

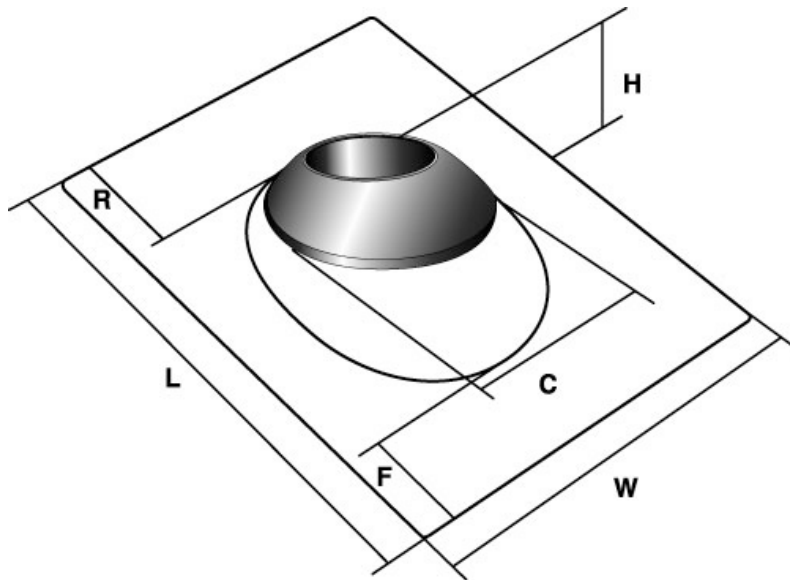

| Roof Flashing Dimensional Characteristics | | | | | | | |
|---|-------------|--------|---------|--------|--------|--------|--------|
| Stock# | Pipe Size | Dim. W | Dim. L | Dim R | Dim. F | Dim. C | Dim. H |
| CNC15 | 1.25"-1.5" | 8.75 | 12.625" | 3.625" | 2.25" | 4.25" | 2.125" |
| CNC20 | 2" | 8.75" | 12.625" | 3.625" | 2.25" | 4.25" | 2.125" |
| CNC30 | 3" | 10.75" | 14.5" | 4.5" | 2.5" | 5.5" | 2.625" |
| CNC40 | 4" | 11.75" | 15.5" | 4.5" | 2.5" | 6.5" | 2.375" |
| CN123 | 1.25"-2"-3" | 10.75" | 14.5" | 4.25" | 2.5" | 5.25" | 2.75" |
| CN340 | 3" - 4" | 11.75" | 15.5" | 4.5" | 2.5" | 6.5" | 3" |

ASTM INFORMATION:

Copper:

ASTM B-370 FED QQ-C-576 AMS 4500 UNS-C11000 Dead Soft Copper

Premium Elastomeric Collar:

Typical Values: Durometer hardness Shore A 67, ASTM D2240. Elongation at break 450%, ASTM D412.

Do not use petroleum-based mastics, sealing compounds or paints on collar!